


LED Lightline LLF40.30

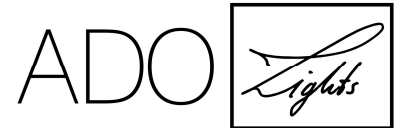

by TTC Timmler Technology GmbH
Christian-Schäfer-Str. 8 | 53881 Flammersheim
T +49 2255 921-200 | F +49 2255 921-500
info@ado-lights.de | www.ado-lights.de

Dimensions [WxH]	Lightline: 40 x 30 mm Mounting profile: 70 x 44 mm Length on request, max. 4 m per piece
Power consumption	max. 30 W/m
Luminous flux	max. 2.000 lm/m
Beam angle	diffuse
Cover:	opaque polyethurane seal for homogeneous illumination without dark spots at the junction, polyethurane seal conform to RoHS and WEEE, UV resistant, weatherproof
Service life	LED: 50.000 hours at 70% of mean luminous flux
Color temperature	White 3.000, 3.500 oder 4.000 Kelvin RGB / RGB+W 3.000 o. 4.000 Kelvin
CRI	CRI > 85 (white)
Control interfrace	with external DALI device DMX
IP rating	IP68, supply cable plug connection IP67
Luminaire housing	Aluminium anodised

Konverter	external with overload protection overtemperature protection short-circuit protection
Optional	phase cut DALI / DMX 1-10 V Mounting profile in stainless steel Curved version
Other	Ambient temperature -25 C up to +50 ° C
Light calculation	EULUM-File see www.ado-lights.de

