


---

# LED-LIGHT LINE

---

Recessed Luminaire  
Stainless Steel  
Standard/High-power/RGB

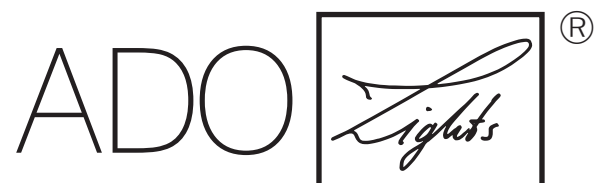


by TTC Timmler Technology

# LED-LIGHT LINE VA

Recessed Luminaire | Stainless Steel  
Standard/High-power/RGB



PICTURES

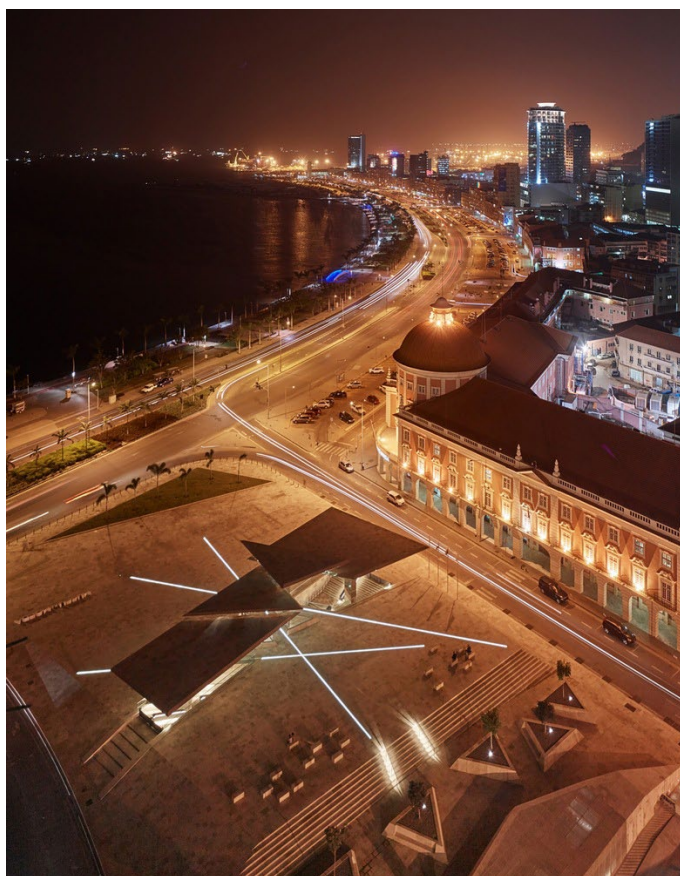

# LED-LIGHTLINE VA

Recessed Luminaire | Stainless Steel

Standard/High-power/RGB



## BASE INFORMATION AND GENERAL TECHNICAL SPECIFICATIONS



### LED-LightLine | Eye-catcher + Signpost

Luminous lines when darkness falls. Sometimes an eye-catcher. At other times showing the way. They accentuate entrance areas or emphasize architectural contours. Lightlines can be integrated in façades and floor spaces – they are always an optical highlight.

#### Features

- For public spaces, façades, entrance areas
- Straight or curved versions
- Safe to walk or drive in for vehicles with air-filled tires
- Implementation in variable applications from user-friendly small applications to building automatism systems
- Perfect homogeneous lighting
- Light colours monochrome, optional standard: multicolor
- PoE-enabled

<b>DIMENSIONS [W X H]</b>	20 x 20 mm   Rectangular profile
<b>POWER CONSUMPTION</b>	STANDARD: 19.2 W/m   14.4 W/m [RGB] HIGH-POWER: 38 W/m
<b>LUMINOUS FLUX</b>	STANDARD: Module efficiency 75 lm/W Luminous flux 450 lm Nominal luminous flux 1,280 lm HIGH-POWER: Module efficiency 100 lm/W Luminous flux 1,160 lm Nominal luminous flux 3,320 lm
<b>SERVICE LIFE</b>	LED and EVG 50.000 hours at 70% of mean luminous flux
<b>COLOUR TEMPERATURE</b>	STANDARD: White   2,700/3,000/3,500/4,000 Kelvin optional RGB HIGH-POWER: White   2,700/3,000/3,500/4,000 Kelvin
<b>CRI</b>	CRI > 85
<b>CONTROL INTERFACE</b>	with ballast compatible to any interface as i.e. DMX512, DALI, EIB etc.
<b>IP RATING</b>	IP68
<b>CERTIFICATES</b>	CE, RoHs
<b>LUMINAIRE HOUSING</b>	Stainless Steel
<b>COVER</b>	High-quality, opaque polyurethane seal
<b>OTHER</b>	Ambient temperature -25 °C up to +50 °C Connection cable with plug connection IP67 suitable for mounting in the ground, mounting profile made of aluminium or stainless steel PoE-enabled
<b>WEIGHT</b>	0.75 kg/m









# LED-LIGHTLINE VA

Recessed Luminaire | Stainless Steel

Standard/High-power/RGB




TECHNICAL DRAWINGS

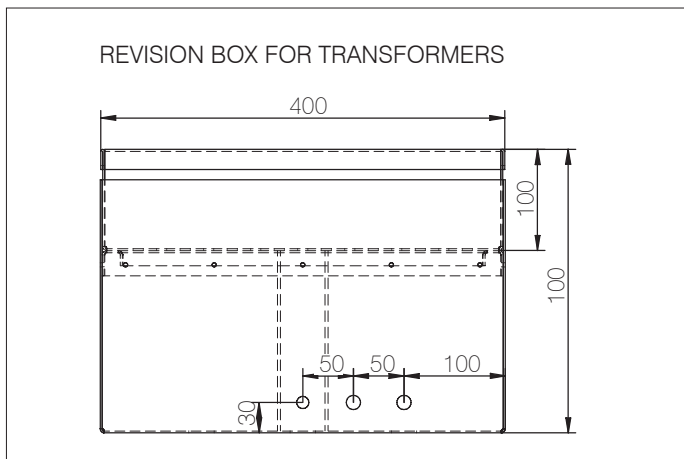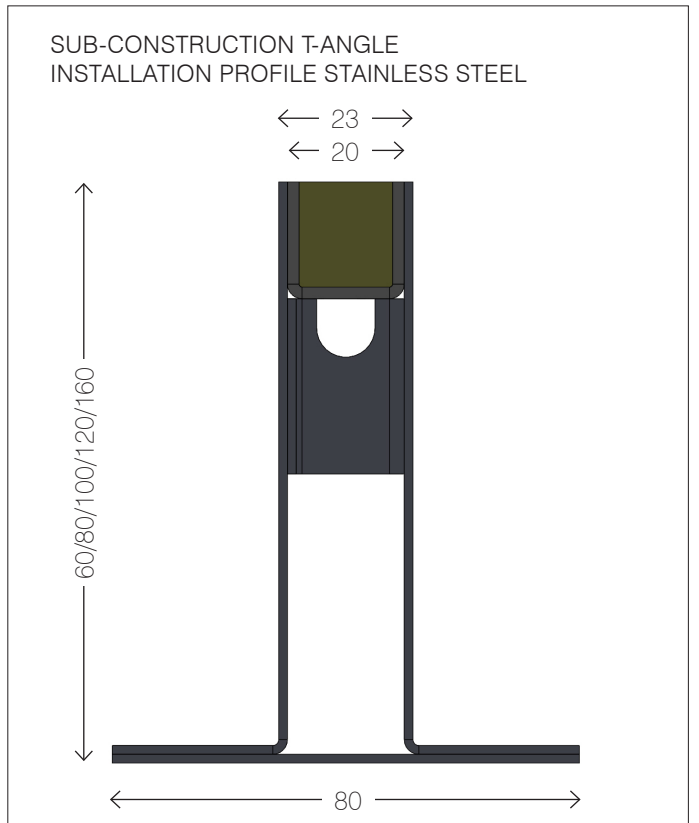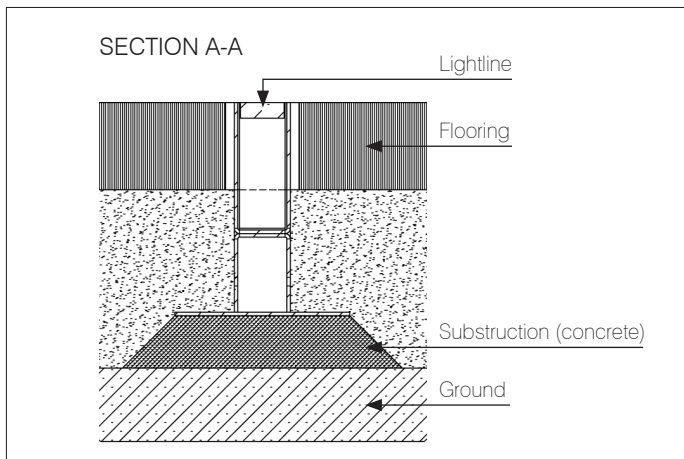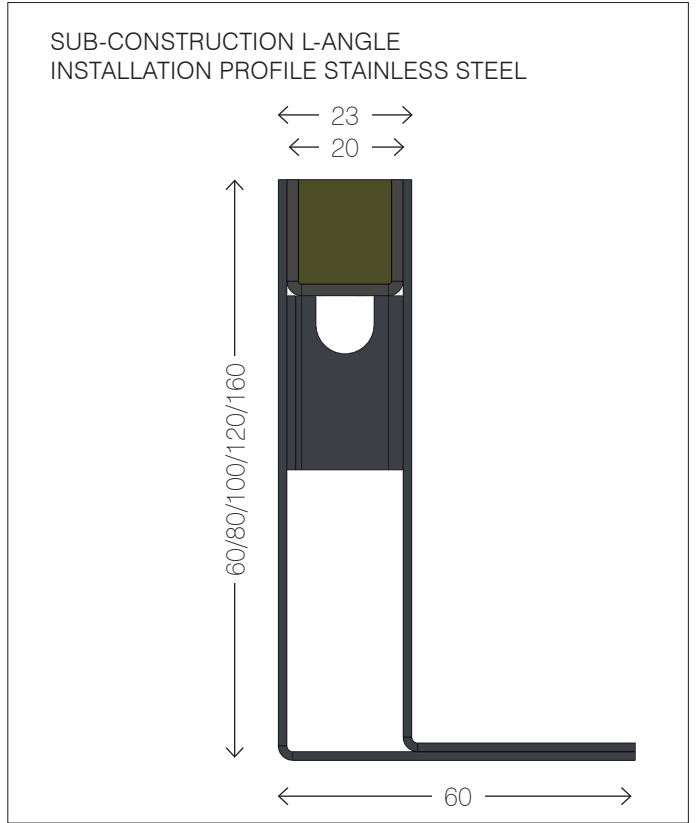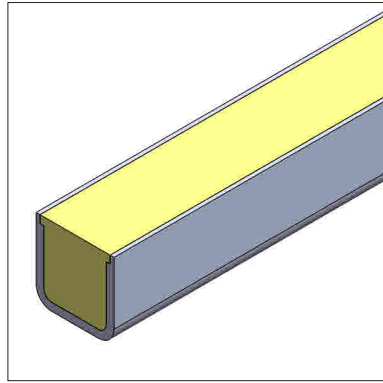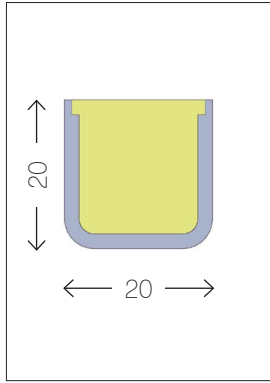

Subject to technical changes · Issued 09/2020

TTC Timmler Technology GmbH  
Christian-Schäfer-Straße 8  
D-53881 Flammersheim [Cologne/Bonn]  
T +49 2255 9212-00  
F +49 2255 9212-99  
E [info@ado-lights.com](mailto:info@ado-lights.com)  
I [www.ado-lights.com](http://www.ado-lights.com)  
[www.led-luc.com](http://www.led-luc.com)

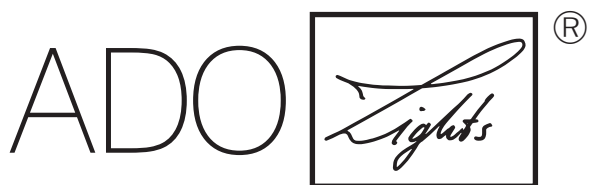

by TTC Timmler Technology

